



MEASURE ASSIGNMENT TOOL

User Guide



[DATE]
[COMPANY NAME]
[Company address]

1. Select a Reach

2. Assign Measures

Reach Selection

1. SELECT RIVER

2. SELECT SEGMENT

Drina

Ibar

Lim

Tara

Segment ID is

- All -

9

10

11

12

13

14

3. SELECT FILTERED REACH

Lim 9/3

Lim 9/4

Lim 9/5

Lim 10/1

Lim 11/1

Lim 12/1

Lim 13/1

Lim 14/1

Assessment Status

Not assessed

Assignment pending

Fully assigned

Measures selected

1. Select a Reach

2. Assign Measures

Reach Selection

1. SELECT RIVER

2. SELECT SEGMENT

Drina

Ibar

Lim

Tara

Segment ID is

- All -

9

10

11

12

13

14

3. SELECT FILTERED REACH

Lim 9/3

Lim 9/4

Lim 9/5

Assessment Status

Not assessed


Assignment pending

Fully assigned


Measures selected

Select the river and the Segment ID. The list gets filtered automatically. Click on a displayed reach.

OR

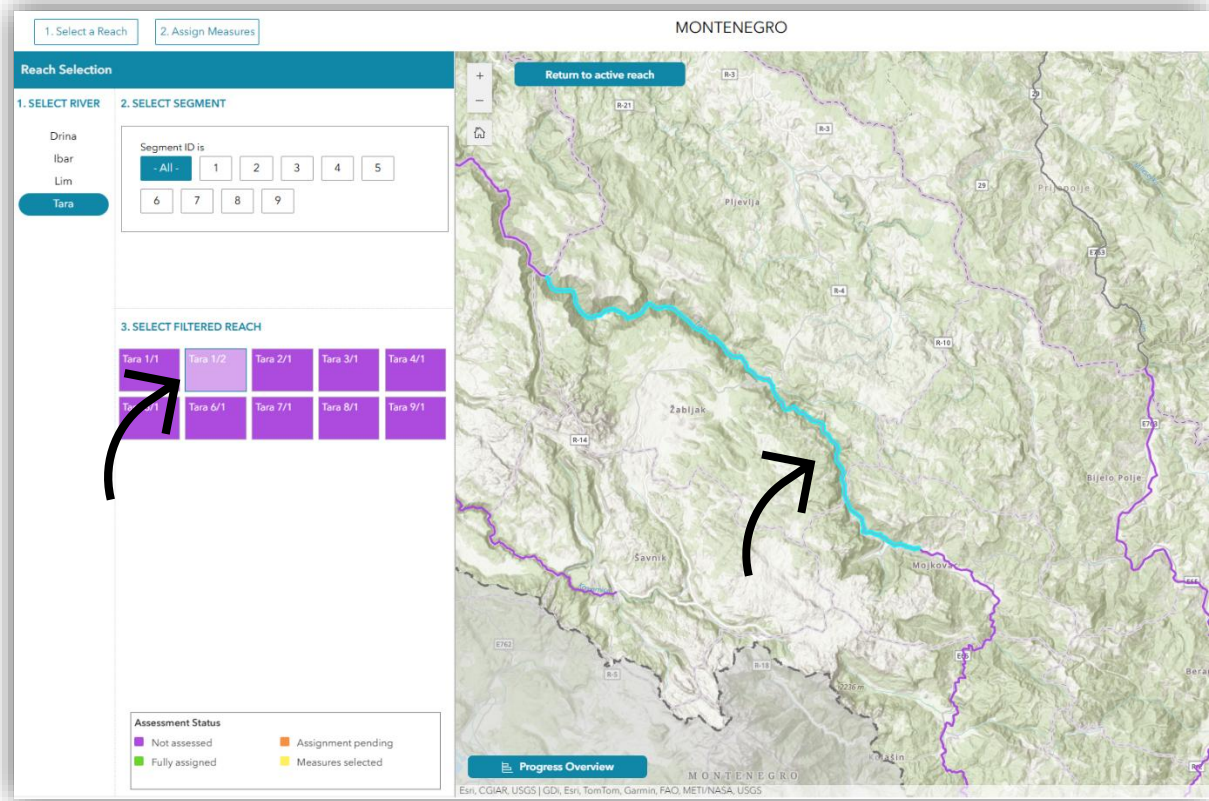

Click on a reach on the map. In the panel on the left, the selected reach will be highlighted. Click the highlighted reach in the selection panel and then proceed as usual.

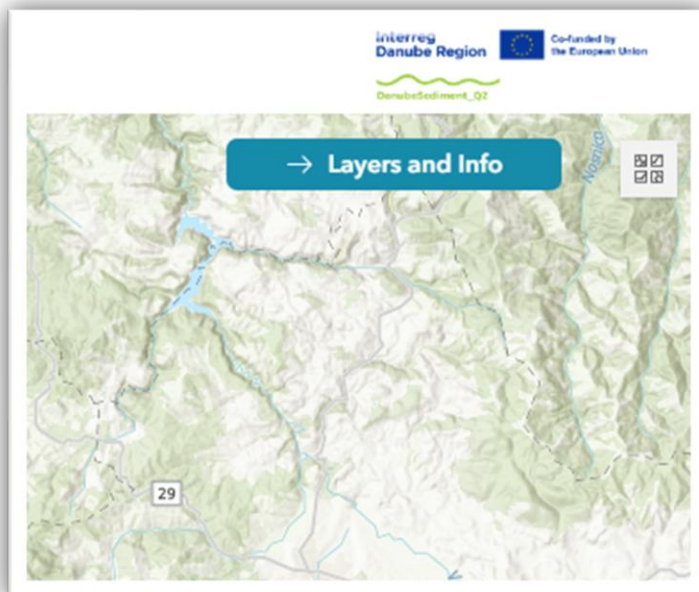

When a feature, such as a reach or barrier, is selected on the map, click on **Layers and Legend** in the side panel. There, you can view all available information related to the selected feature.

Layers
Legend
Feature Information

REACH CHARACTERISTICS

D4A ID	023S023R001
River Name	Piva
Confinement	Confined
Planform	Single-thread Sinuous
Barrier / Impounded	yes / yes
Reach length	13.31 km

ASSESSMENT INFO

Assessment Status	Fully assigned
Assessment Date	14.9.2026
Selected Measures	7
Assigned Measures	7
Pending Assignment	0

REACH ASSIGNED MEASURES

7 measure(s) assigned across 5 group(s).

- **ENHANCE SEDIMENT CONTINUITY AT THE DAM (1)**
- D4A_001 Prevent sedimentation at the dam by artificial turbulence
- **ENHANCE SEDIMENT CONTINUITY IN THE RESERVOIR (2)**
- **IMPROVE FISH CONTINUITY (2)**
- D4A_027 Develop early warning system at hydropower dam with operational adjustment
- D4A_037 Install sensory behavioural barriers with bypass system
- **IMPROVE FLOOD RETENTION THROUGH MEASURES IN THE FLOODPLAIN (1)**
- **PROVIDE SUFFICIENT RESIDUAL FLOW (1)**

1. Select a Reach

2. Assign Measures

Measure Assignment

Selected Reach: 023S023R001

Problems: 10 | Initial suggestions: 46 | Impounded: Yes | Barrier: Yes | Selected measures: 0 | Country: ME | Assessment: DSQ2_ME_023S023R001

Current reach lock: Ready on reach 023S023R001. The workflow will lock once filters, selections, or assignments are started.

► Data-source diagnostics – OK

MEASURE SELECTION

Zoom to active reach

CONTEXT FILTERS

Is the reach impounded? ☒ Yes ☐ No

Is there a barrier upstream or downstream? ☒ Yes ☐ No

Apply context filters

Answer both questions to filter the suggested measures.

► Active problem fields (10)

After selecting the reach, answer two yes/no questions:

- Is the reach impounded?
- Is there a barrier upstream or downstream?

Then click continue. Suggested Measures are then displayed based on the problem analysis for that reach.

Measure Assignment

Selected Reach: 023S023R001

Problems: 10 | Initial suggestions: 46 | Impounded: No | Barrier: Yes | Selected measures: 6 | Country: ME | Assessment: DSQ2_ME_023S023R001

Current reach lock: Workflow locked to reach 023S023R001. Map/reach clicks will not switch the assessment unless you confirm it.

► Data-source diagnostics – OK

MEASURE SELECTION

Zoom to active reach

[Change impounded / barrier answers](#)

DanubeSediment Q2 measure mode is active. The checklist is restricted to measures flagged as part of the DanubeSediment Q2 subset.

Unclassified measures are hidden in this widget configuration. Measures without assignment rules will not appear in the checklist or be preselected from existing rows.

SUGGESTED MEASURES	32	SELECTED	6
Improve flood retention through measures in the floodplain ☒ D4A_045 Reconnection of side-channels or enhance floodplain erosion		D4A_002 Construct local sediment bypass ×	
		D4A_039 Removal of riverbed revetment ×	
Provide sufficient residual flow ☒ D4A_054 Establish dynamic ecological flows		D4A_045 Reconnection of side-channels or enhance floodplain erosion ×	
☐ D4A_055 Optimize operating rules to restore more natural hydrological regimes		D4A_054 Establish dynamic ecological flows ×	
Reduce riverbed erosion ☐ D4A_058 Remobilisation of consolidated gravel bars		D4A_059 Implementation of gravel bars ×	
☒ D4A_059 Implementation of gravel bars		D4A_060 Sediment feeding ×	
☒ D4A_060 Sediment feeding			
☐ D4A_061 Riverbank restoration			

Clear current ticks

Confirm selection

► Active problem fields (10)

Select the proposed measures and click **Confirm Selection**.

Measure Assignment

Selected Reach: 023S023R001
Problems: 10 | Initial suggestions: 46 | Impounded: No | Barrier: Yes | Selected measures: 7 | Country: ME | Assessment: DSQ2_ME_023S023R001

Current reach lock: Workflow locked to reach 023S023R001. Map/reach clicks will not switch the assessment unless you confirm it.

► Data-source diagnostics – OK

GROUP ASSIGNMENT

Reach Measures 1/1

Dam and Barrier Measures 2/2

Dike Measures 0/1

Sidearm Measures 0/1

Gravel Bars 0/1

Sediment Feeding/Dredging 0/1

Dike Measures

1 selected measure(s), 0 assigned, 1 pending.

☒ **D4A_040** Removal of dikes pending

Map assignment

Open the relevant Experience Builder editor, assign the pending measures on the map, then confirm the group here.

Open Editor

Confirm this group assignment

Milestone 5 records your confirmation but does not yet verify geometry automatically.

Switched to the Dike Measures view. Assign the pending measures on the map, then return here and confirm this group.

Before editing: Make sure the relevant layer is turned on in the layer list.

After editing: If it doesn't display right, try zooming in/out.

← Close Editor toolbar

Editor

Settings

Edit features


Select

Create features

Dike Measures


Dike

The selected measures are now displayed in their respective groups. Some measures, such as dike measures, require a **map assignment**, as indicated in the panel on the left. Click **Open Editor** to open the corresponding editor. The example on the right shows the **Dike Editor**.

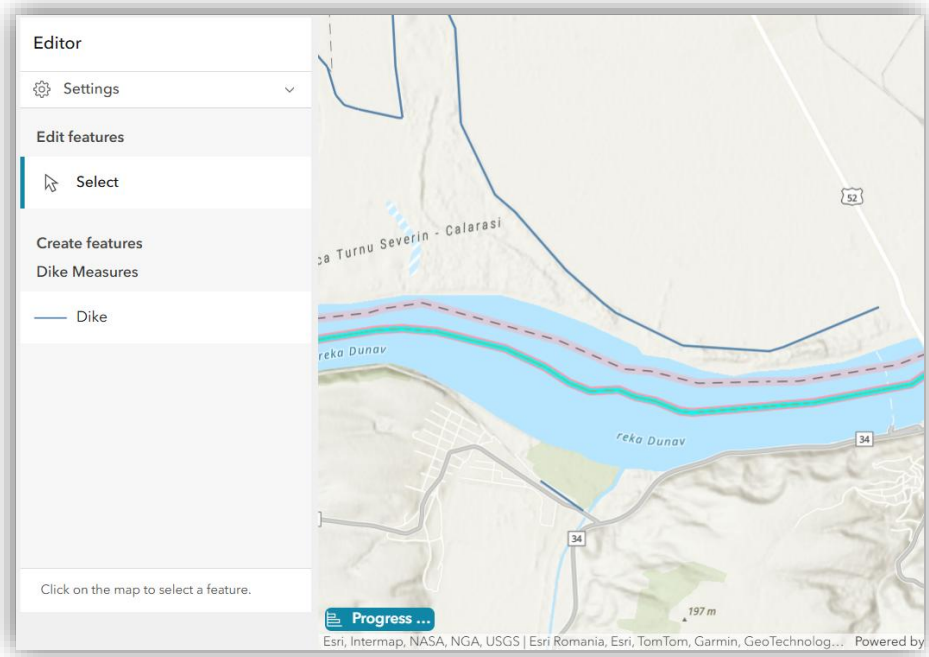


In the editor panel, click **Select** to edit an already existing Dike. Click on the respective feature in the map.

OR

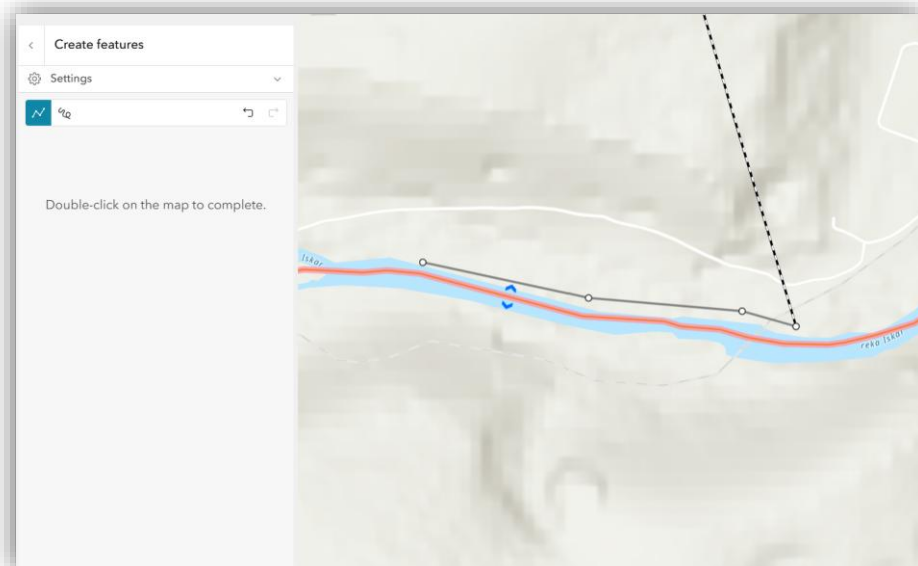

In the editor panel, click **Dike** to draw a new dike. You can then choose to draw a dike either as a **straight line** or **freehand**. Once the dike has been drawn, click **Enter** to finish the drawing.

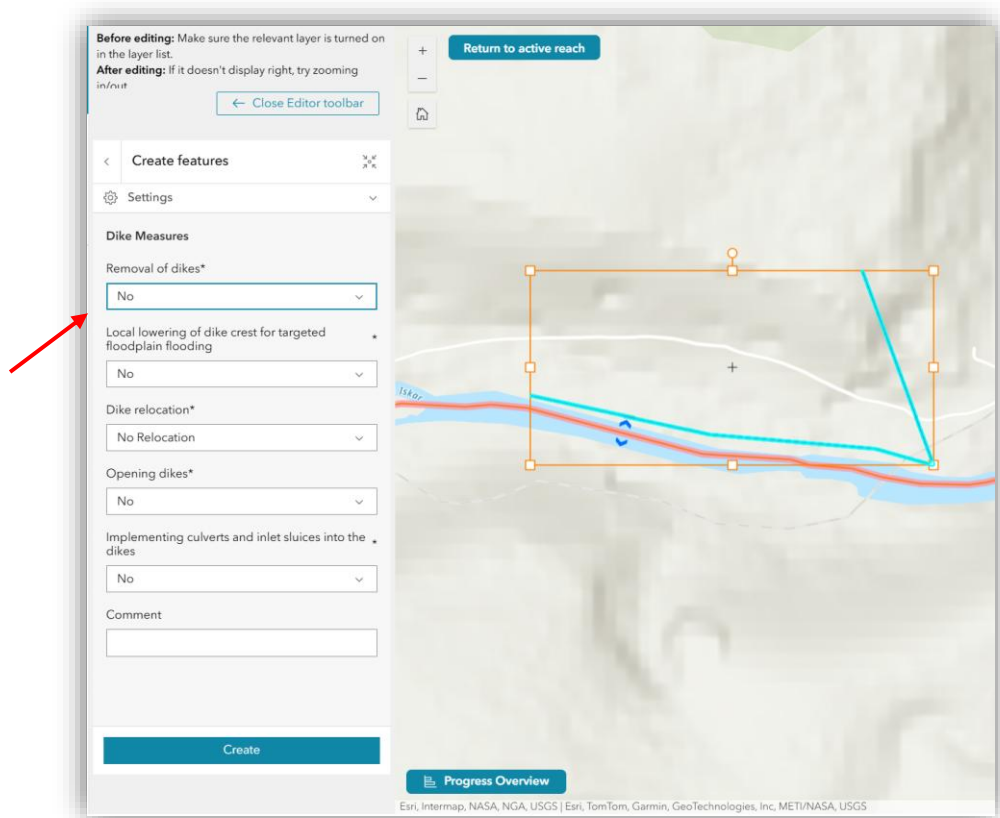

After selecting an existing dike or confirming the drawing, a form will automatically open asking for additional information about the dike.


Here, specify what should happen to the feature. For example, indicate whether an existing dike should be e.g. removed, relocated or opened.

As a general rule, if a feature is missing from the map, please draw it first and then describe the intended action in the corresponding information field. If only part of a dike is affected, for example if a section should be removed or modified, draw only the relevant section and enter the appropriate information in the form.

Additional details can also be added in the **Comments** field where useful.

To exit the editor mode, click **Close Editor Toolbar**.

If the drawing mode is still active and the editor cannot be closed, first click the < button next to **Create Feature** (highlighted in red in the example). Then click **Close Editor Toolbar** again.

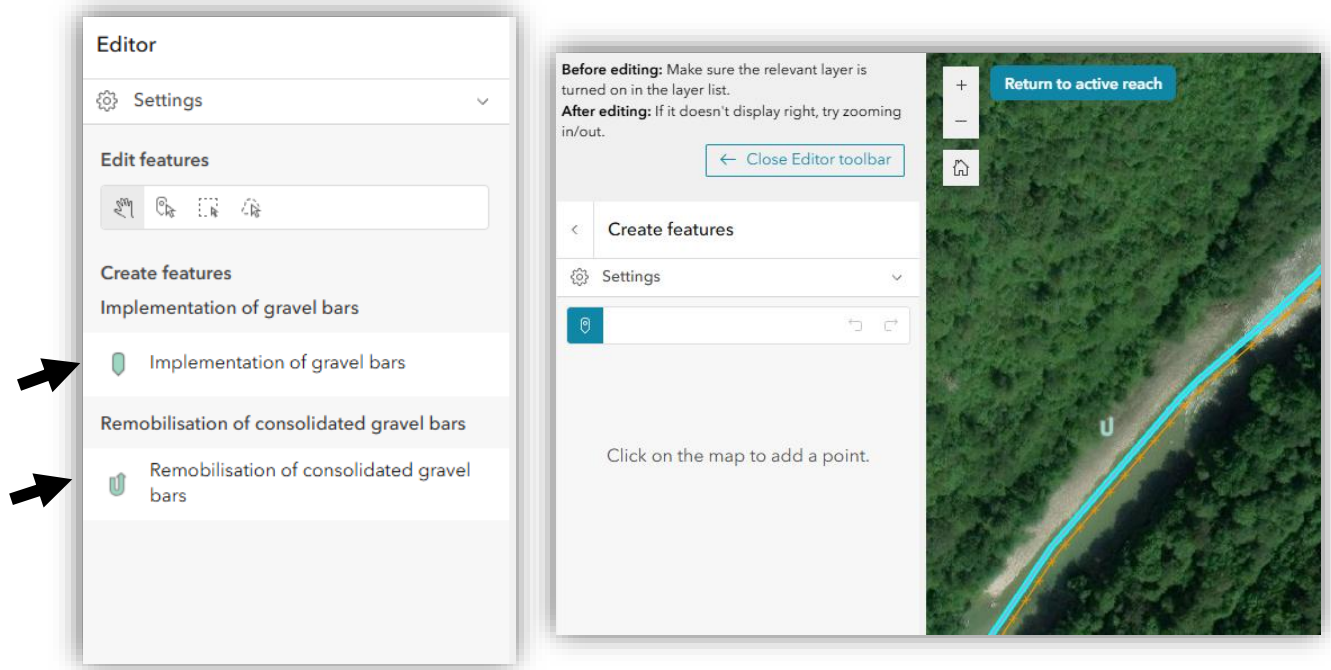

The same procedure applies to other features, such as **gravel bars**. In the editor panel on the left, select the relevant feature type. In the example shown, the available features are marked with arrows for illustration purposes.

After selecting the feature, the corresponding drawing tool opens. The feature can then be drawn and completed following the same procedure described above.

Measure Assignment

Selected Reach: 023S023R001

Problems: 10 | Initial suggestions: 46 | Impounded: No | Barrier: Yes | Selected measures: 7 | Country: ME | Assessment: DSQ2_ME_023S023R001

Current reach lock: Workflow locked to reach 023S023R001. Map/reach clicks will not switch the assessment unless you confirm it.

► Data-source diagnostics – OK

GROUP ASSIGNMENT

[Zoom to active reach](#) [Back to selected measures](#)

Reach Measures 1/1

Dam and Barrier Measures 2/2

Dike Measures 1/1

Sidearm Measures 1/1

Gravel Bars 1/1

Sediment Feeding/Dredging 1/1

Sediment Feeding/Dredging

1 selected measure(s), 1 assigned, 0 pending.

☒ D4A_060 Sediment feeding assigned

Map assignment

Open the relevant Experience Builder editor, assign the pending measures on the map, then confirm the group here.

[Open Editor](#)

[Confirm this group assignment](#)

Milestone 5 records your confirmation but does not yet verify geometry automatically.

You can change the selection for Sediment Feeding/Dredging again. Untick measures or open the editor as needed, then confirm.

Measure Assignment

Selected Reach: 023S023R001

Problems: 10 | Initial suggestions: 46 | Impounded: No | Barrier: Yes | Selected measures: 7 | Country: ME | Assessment: DSQ2_ME_023S023R001

Current reach lock: Workflow locked to reach 023S023R001. Map/reach clicks will not switch the assessment unless you confirm it.

► Data-source diagnostics – OK

GROUP ASSIGNMENT

[Zoom to active reach](#) [Back to selected measures](#)

Reach Measures 1/1

Dam and Barrier Measures 2/2

Dike Measures 1/1

Sidearm Measures 1/1

Gravel Bars 1/1

Sediment Feeding/Dredging 1/1

Sediment Feeding/Dredging

1 selected measure(s), 1 assigned, 0 pending.

☒ D4A_060 Sediment feeding assigned

Group complete

All kept measures in this group are assigned.

All measure groups are complete for this reach.

[Change selection](#)
[View Summary](#)

There are no pending changes in Sediment Feeding/Dredging.

After a group has been edited, using the editor where required, click **Confirm This Group Assignment**. The group status will then change from **Pending** (red) to **Assigned** (green).

Once all groups have been assigned, the status **Group Complete** will be displayed, as shown in the example on the right.

Measure Assignment

Selected Reach: 023S023R001

Problems: 10 | Initial suggestions: 46 | Impounded: No | Barrier: Yes | Selected measures: 7 | Country: ME | Assessment: D5Q2_ME_023S023R001

Current reach lock: Workflow locked to reach 023S023R001. Map/reach clicks will not switch the assessment unless you confirm it.

► Data-source diagnostics – OK

SUMMARY

Zoom to active reach

Back to assignment workflow

Confirm assignment and select next reach

This submits the final assessment status for this reach. You can still return to the assignment workflow beforehand if something needs to change.

Total selected measures: 7 Impounded: No Barrier: Yes

Reach Measures 1

D4A_039 Removal of riverbed revetment

Dam and Barrier Measures 2

D4A_002 Construct local sediment bypass

D4A_054 Establish dynamic ecological flows

Dike Measures 1

D4A_040 Removal of dikes

Sidearm Measures 1

D4A_045 Reconnection of side-channels or enhance floodplain erosion

Gravel Bars 1

D4A_059 Implementation of gravel bars

Sediment Feeding/Dredging 1


D4A_060 Sediment feeding

Once all groups are marked as **Assigned**, click **View Summary**. The summary provides an overview of all assignments and allows you to make any final changes if necessary.

When everything is correct, click **Confirm Assignment and Select Next Reach** to complete the current reach and continue with the next one.

Previously completed reaches can still be selected and edited later if changes are required.

Congratulations — you have successfully completed the assignment for a reach.

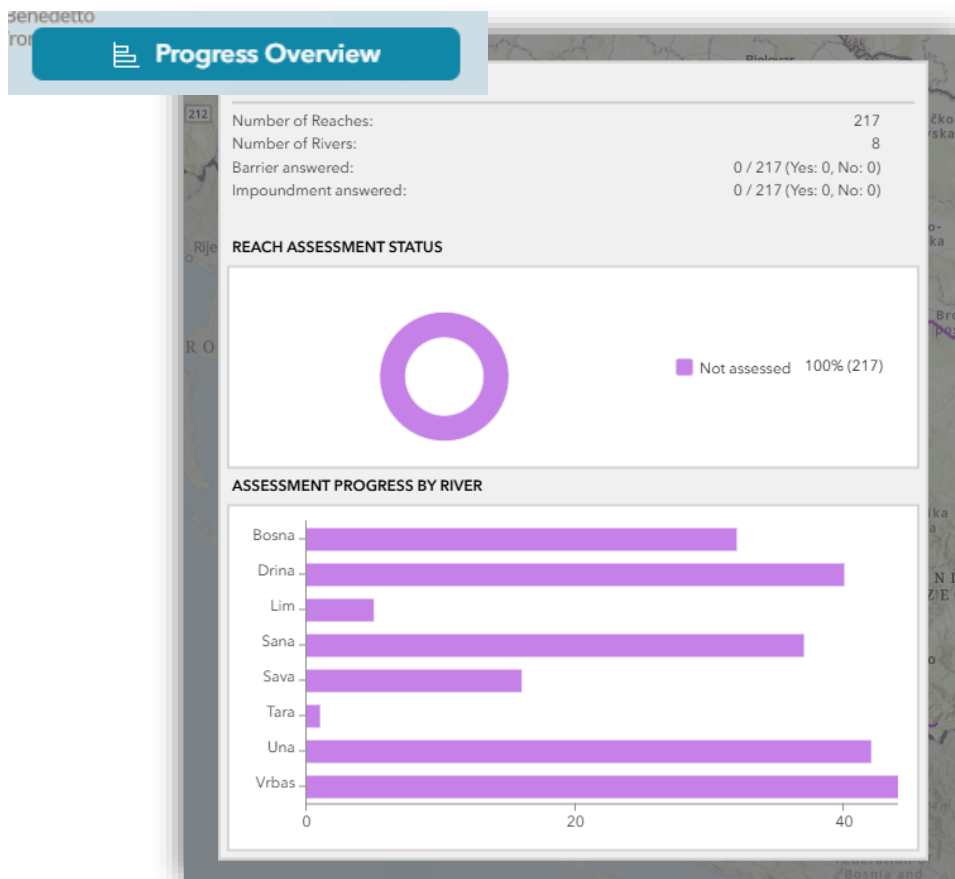

Click on Progress Overview on the bottom left of the page to view a summary of the assessment status.